

KOMATSU

PC228USLC-11



Hydraulic excavator

Engine power
123 kW / 165 HP @ 2000 rpm

Operating weight
24350 - 27925 kg

Bucket capacity
max. 1.49 m³

PC228USLC-11



Engine power

123 kW / 165 HP @ 2000 rpm

Operating weight

24350 - 27925 kg

Bucket capacity

max. 1.49 m³



Exceptional workability and **environmental performance**

Powerful and environmentally friendly

- EU Stage V engine
- Adjustable idle shutdown
- Komatsu fuel-saving technology
- Viscous engine fan clutch
- Up to 21% higher lifting capacity

Maximised efficiency

- Increased productivity
- Built-in versatility and superior productivity
- Short tail swing and exceptional stability
- Enhanced engine management
- Improved hydraulic efficiency
- Komatsu Integrated Attachment Control (KIAC)

First-class comfort

- Fully air-suspended operator seat
- Low-noise design
- Widescreen monitor with evolutionary interface
- Improved operator convenience

Safety first

- Komatsu SpaceCab™
- Improved monitoring system
- Neutral position detection system
- KomVision surround view system

Quality you can rely on

- Komatsu-quality components
- Extensive dealer support network

Komtrax

- Komatsu Wireless Monitoring System
- 4G mobile communications
- Integrated communication antenna
- Increased operational data and reports



A maintenance program
for Komatsu customers



Higher productivity

The PC228USLC-11 is quick and precise. It features a powerful Komatsu EU Stage V engine, Komatsu's Closed Center Load Sensing (CLSS) hydraulic system and first-class Komatsu comfort to provide a fast response and unrivalled productivity for its class.

Komatsu fuel-saving technology

Fuel consumption on the PC228USLC-11 is lower by up to 6%. Engine management is enhanced. The variable speed matching of the engine and hydraulic pump and a viscous fan clutch guarantee efficiency and precision during single and combined movements.


Adjustable idle shutdown

The Komatsu auto idle shutdown automatically turns off the engine after it idles for a set period of time. This feature can easily be programmed from 5 to 60 minutes, to reduce unnecessary fuel consumption and exhaust emissions, and to lower operating costs. An Eco-gauge and the Eco guidance tips on the cab monitor further encourage efficient operations.

Powerful and environmentally friendly



Komatsu EU Stage V

The Komatsu EU Stage V engine is productive, dependable and efficient. With ultra-low emissions, it provides a lower environmental impact and a superior performance to help reduce operating costs and lets the operator work in complete peace of mind.

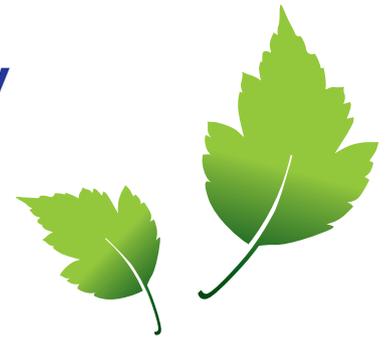

Heavy-duty aftertreatment

The aftertreatment system combines a Komatsu Diesel Particulate Filter (KDPF) and Selective Catalytic Reduction (SCR). The SCR injects the correct amount of AdBlue® into the system at the proper rate to break down NOx into water (H₂O) and non-toxic nitrogen gas (N₂). NOx emissions are reduced by 80% vs. EU Stage IIIB engines.

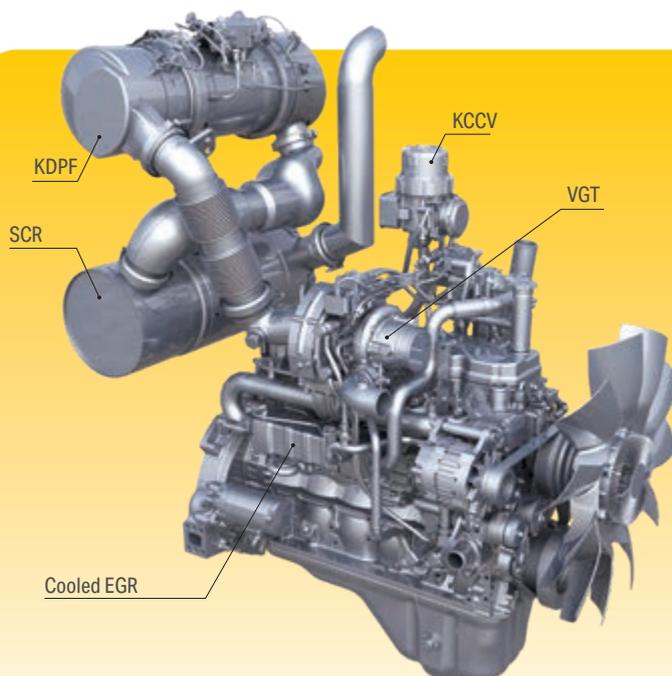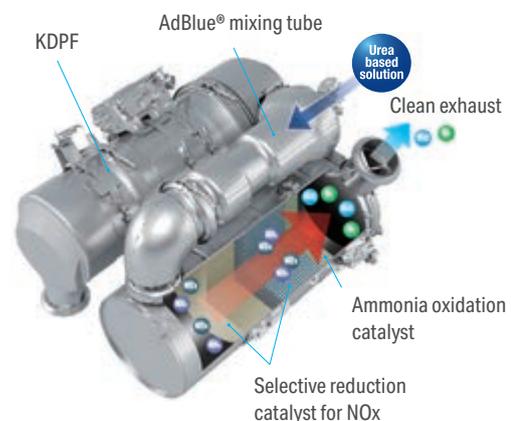

High-Pressure Common Rail (HPCR)

To achieve complete fuel burn and lower exhaust emissions, the heavy-duty High-Pressure Common Rail fuel injection system is computer controlled to deliver a precise quantity of pressurised fuel into the redesigned engine combustion chamber by multiple injections.

Exhaust Gas Recirculation (EGR)

Cooled EGR is a technology well-proven in current Komatsu engines. The increased capacity of the EGR cooler now ensures very low NOx emissions and a better engine performance.

Komatsu Closed Crankcase Ventilation (KCCV)

Crankcase emissions (blow-by gas) are passed through a CCV filter. The oil mist trapped in the filter is returned back to the crankcase while the filtered gas is returned to the air intake.



Variable Geometry Turbo (VGT)

The VGT provides optimal airflow to the engine combustion chamber under all speed and load conditions. Exhaust gas is cleaner, fuel economy is improved while machine power and performance are maintained.

PC228USLC-11

Short tail swing and exceptional stability

The PC228USLC-11 has a rounded profile with minimal protrusions at both the front and the rear. Its ultra-short tail swing radius is perfect for work in tight spaces, particularly in urban areas, or for road construction, logging and demolition. Thanks to optimised packaging, the PC228USLC-11 is exceptionally stable. Coupled with the machine's wide working range, this stability makes it ideal for any work requiring long reach, such as demolition jobs and slope cutting. With ample dumping reach available for loading operations, the operator can always work easily, efficiently and with absolute confidence.

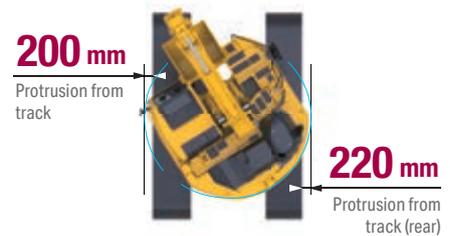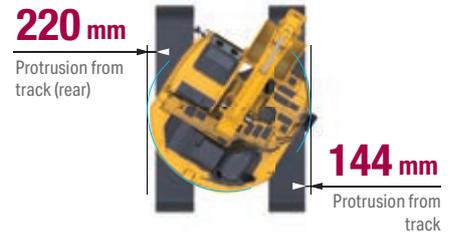

Two optional hydraulic lines to mount a variety of attachments



Full length track roller guards (optional)



Versatility at your fingertips: select the perfect setting for each job

Built-in versatility

Powerful and precise, the Komatsu PC228USLC-11 is equipped to efficiently carry out any task your business requires. On all jobsites, big or small, for digging, trenching, landscaping or site preparation, the Komatsu hydraulic system always provides maximum productivity and control.

A wide choice of options

Two optional attachment lines are available and 15 attachment memory settings are simply customised. Combined with a standard-fit hydraulic quick coupler power circuit, it's easier than ever to switch working styles. With a choice of arms and undercarriages, you can configure the PC228USLC-11 to match specific demands for transport, working envelope or duty.

6 working modes

The PC228USLC-11 delivers the power required with the lowest fuel usage. 6 working modes are available: Power, Lifting/Fine Operation, Breaker, Economy, Attachment Power and Attachment Economy. The operator can ideally balance the Economy mode between power and economy to match the work at hand. The oil flow delivered to hydraulic attachments is also adjustable directly on the class-leading widescreen monitor panel.

Maximised efficiency



Two-piece boom (option)



Komatsu Integrated Attachment Control (KIAC) for up to 15 tool presets for oil flow and pressure (option)



Dozer blade (option) suitable for 600 mm triple grouser (steel) and road-liner (rubber) shoes

First-class comfort

Increased comfort

In the wide Komatsu SpaceCab™, a standard air-suspended high-back seat, heated for improved comfort and with fully adjustable armrests, is the centre of a comfortable and low-fatigue working environment. High visibility and ergonomic controls further assist to maximise the operator's productivity.

Perfect operator convenience

In addition to the standard radio, the PC228USLC-11 has an auxiliary input for connecting external devices and play music through the cab speakers. Two 12-volt power ports are also incorporated in the cab. Proportional controls are fitted as standard for safe and precise operation of attachments.

Low-noise design

Komatsu crawler excavators have very low external noise levels and are especially well-suited for work in confined spaces or urban areas. The optimal usage of sound insulation and of sound absorbing materials helps to make noise levels inside the cab comparable to those of an executive car.



Convenient, ergonomic and precise control: joysticks with proportional control button for attachments



Automatic air conditioner




Magazine box

Safety first

Optimal jobsite safety

Safety features on the Komatsu PC228USLC-11 comply with the latest industry standards and work in synergy to minimise risks to people in and around the machine. A neutral detection system for travel and work equipment levers increase jobsite safety, along with a seat belt caution indicator and an audible travel alarm. Highly durable anti-slip plates – with additional high friction covering – maintain long term traction performance.

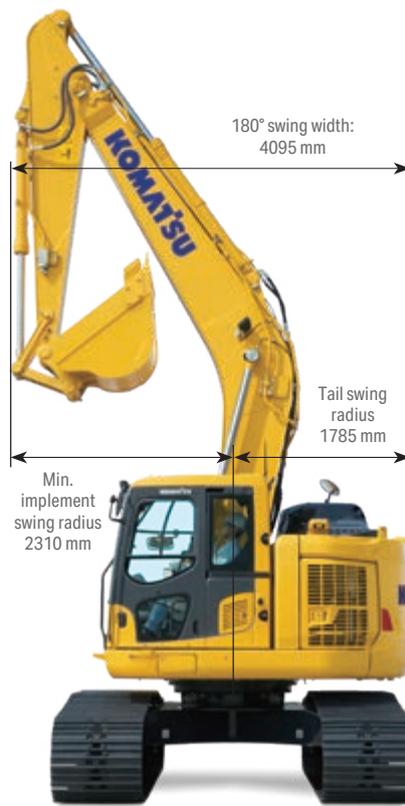

Short tail swing radius

1.79 m – Because the tail of the PC228USLC-11 is more compact than conventional models, the PC228USLC-11 reduces the operator's need to check behind him for movement.

Short implement swing radius

2.31 m – Boom raising angle of the PC228USLC-11 is larger than the PC210-11, while front implement protrusion is lessened.



KomVision cameras



Exceptional operator protection



Hand rails and anti-slip plates

KomVision

KomVision machine visibility gives the operator a constant clear view of the safety zone around the machine. This allows the operator to focus on the work at hand even in low light conditions.

Komatsu SpaceCab™

The ROPS cab has a tubular steel frame and provides high shock absorbency, impact resistance and durability. The seat belt is well designed to keep the operator in the safety zone of the cab in the event of a rollover. Optionally the cab can be fitted with a Falling Object Protective System (FOPS) with openable front guard.

Safe maintenance

Thermal guards around high temperature areas of the engine, protected fan belt and pulleys, a pump/engine partition that prevents hydraulic oil from spraying onto the engine, and exceptionally sturdy handrails: in Komatsu tradition, the highest safety level is provided for a fast and smooth maintenance.



Lower operating costs

Komatsu ICT contributes to the reduction of operating costs by assisting to comfortably and efficiently manage operations. It raises the level of customer satisfaction and the competitive edge of our products.

Widescreen monitor


Installed with a choice of 26 languages, the widescreen monitor with simple switches and multi-function keys gives fingertip access to a large range of functions and operating info.

An evolutionary interface


Helpful information is now easier than ever to find and understand with the upgraded monitor interface. An optimal main screen for the ongoing work can be selected simply by pressing the F3 key.



Quick view on the operation logs

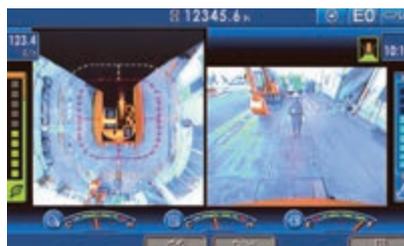

With KomVision, various camera view options are available whilst maintaining constant "birdview" from above the machine

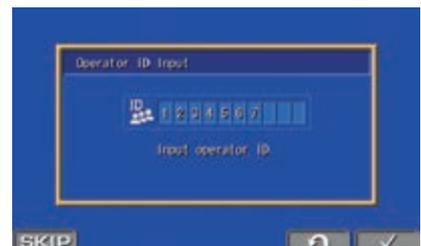

Operator identification function

Information & communication technology



Knowledge

You get quick answers to basic and critical questions about your machines – what they're doing, when they did it, where they're located, how they can be used more efficiently and when they need to be serviced. Performance data is relayed by wireless communication technology (satellite, GPRS or 4G depending on model) from the machine to a computer and to the local Komatsu distributor – who's readily available for expert analysis and feedback.

Convenience

Komtrax enables convenient fleet management on the web, wherever you are. Data is analysed and packaged specifically for effortless and intuitive viewing in maps, lists, graphs and charts. You can foresee eventual maintenance issues and required spare parts, and troubleshoot a problem before Komatsu technicians arrive on site.



The way to higher productivity

Komtrax uses the latest wireless monitoring technology. Compatible on PC, smartphone or tablet, it delivers insightful and cost saving information about your fleet and equipment, and offers a wealth of information to facilitate peak machine performance. By creating a tightly integrated web of support it allows proactive and preventive maintenance and helps to efficiently run a business.

Power

The detailed information that Komtrax puts at your fingertips 24 hours a day, 7 days a week gives the power to make better daily and long-term strategic decisions – at no extra cost. Problems can be anticipated, maintenance schedules customised, downtime minimised and machines kept where they belong: working on the jobsite.



Easy maintenance



Central service points

Komatsu designed the PC228USLC-11 with centralised and conveniently located service points to make necessary inspections and maintenance quick and easy.

Komatsu Care

Komatsu Care is a maintenance program that comes as standard with your new Komatsu machine. It covers factory-scheduled maintenance, performed with Komatsu Genuine parts by Komatsu-trained technicians. Depending on your machine's engine, it also offers extended coverage of the Komatsu Diesel Particulate Filter (KDPF) and of the Selective Catalytic Reduction (SCR). Please contact your local Komatsu distributor for terms and conditions.

Long-life oil filters

The Komatsu Genuine hydraulic oil filter uses high-performance filtering material for long replacement intervals, which significantly reduces maintenance costs.



AdBlue® tank


For simple access, the AdBlue® tank is installed on the front stairway.

Flexible warranty

When you purchase Komatsu equipment, you gain access to a broad range of programmes and services that have been designed to help you get the most from your investment. For example, Komatsu's Flexible Warranty Programme provides a range of extended warranty options on the machine and its components. These can be chosen to meet your individual needs and activities. This programme is designed to help reduce total operating costs.



Basic maintenance screen

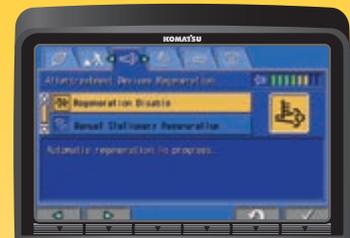

Aftertreatment device regeneration screen for the KDPF



AdBlue® level and refill guidance



Quality you can rely on

Komatsu-quality


With the latest computer techniques and a thorough test programme, Komatsu produces equipment to meet your highest standards. All major components of the PC228USLC-11 are designed and directly manufactured by Komatsu, and essential machine functions are perfectly matched for a highly reliable and productive excavator.

Rugged design


Maximum toughness and durability are the cornerstones of Komatsu's philosophy – along with safety and top class customer service. Single piece plates and castings are used in key areas of the machine's structure for good load distribution. Highly durable rubbing strips on the underside of the arm protect the structure against impact damage.

Extensive support network

The extensive Komatsu distribution and dealer network is standing by to help keep your fleet in optimum condition. Customised servicing packages are available, with express availability of spare parts, to make sure that your Komatsu equipment continues to perform at its peak.

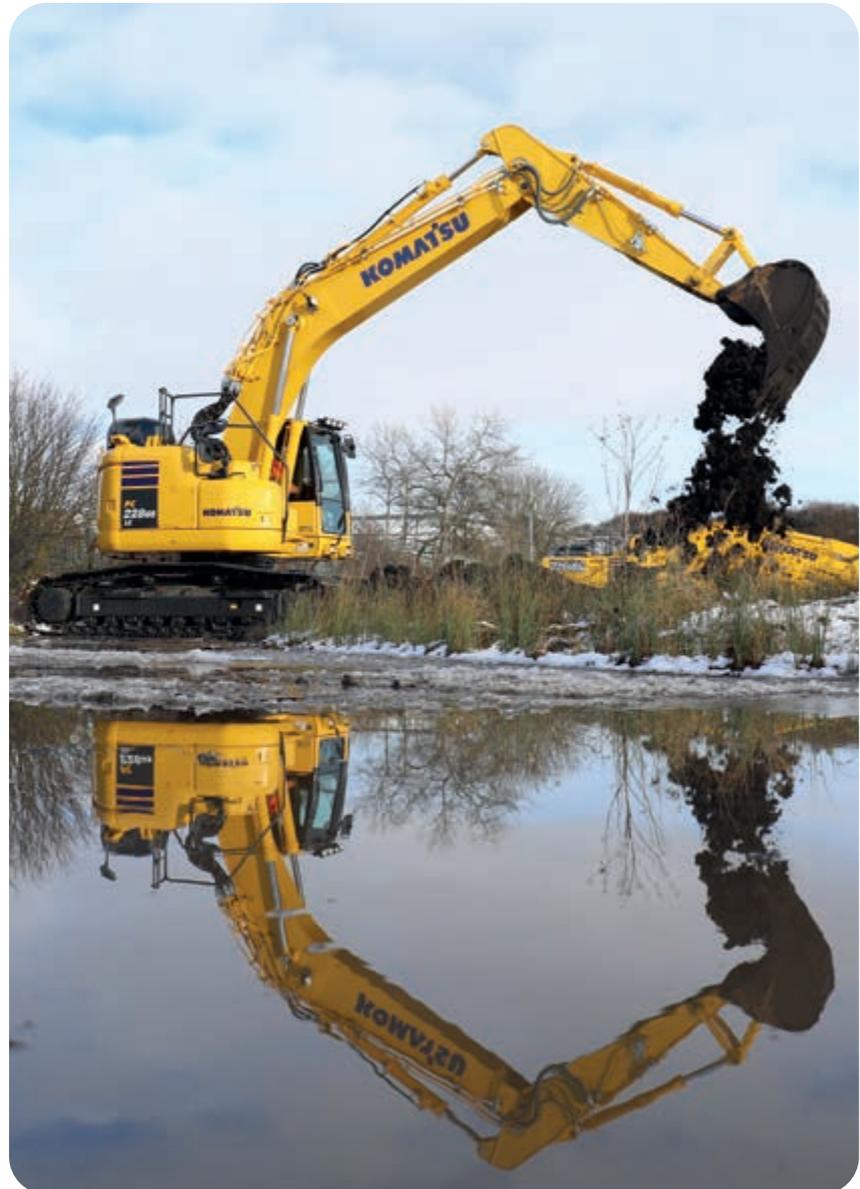

Durable and reliable undercarriage design for maximum protection

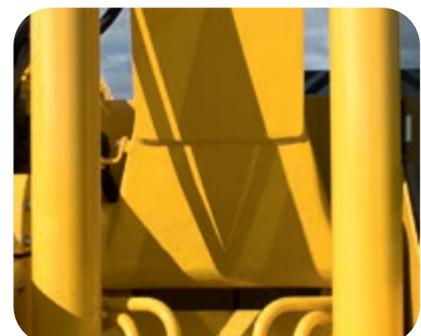

Cast boom foot and single piece boom plates

Specifications

Engine

| | |
|-----------------------------|---|
| Model | Komatsu SAA6D107E-3 |
| Type | Common rail direct injection, water-cooled, emissionised, turbocharged, after-cooled diesel |
| Engine power | |
| at rated engine speed | 2000 rpm |
| ISO 14396 | 123 kW / 165 HP |
| ISO 9249 (net engine power) | 123 kW / 165 HP |
| No. of cylinders | 6 |
| Bore × stroke | 107 × 124 mm |
| Displacement | 6.69 l |
| Air filter type | Double element type with monitor panel dust indicator and auto dust evacuator |
| Cooling | Suction type cooling fan with radiator fly screen |
| Fuel | Diesel fuel, conforming to EN590 Class 2/Grade D. Paraffinic fuel capability (HVO, GTL, BTL), conforming to EN 15940:2016 |

Hydraulic system

| | |
|-----------------------|---|
| Type | HydrauMind. Closed-centre system with load sensing and pressure compensation valves |
| Additional circuits | 2 additional circuits with proportional control can be installed |
| Main pump | 2 variable displacement piston pumps supplying boom, arm, bucket, swing and travel circuits |
| Maximum pump flow | 490 l/min |
| Relief valve settings | |
| Implement | 380 kg/cm ² |
| Travel | 380 kg/cm ² |
| Swing | 300 kg/cm ² |
| Pilot circuit | 33 kg/cm ² |

Service refill capacities

| | |
|-------------------------|--------|
| Fuel tank | 290 l |
| Radiator | 30 l |
| Engine oil | 23.1 l |
| Swing drive | 6.5 l |
| Hydraulic tank | 126 l |
| Final drive (each side) | 5.0 l |
| AdBlue® tank | 13 l |

Swing system

| | |
|--------------|---|
| Type | Axial piston motor driving through planetary double reduction gearbox |
| Swing lock | Electrically actuated wet multidisc brake integrated into swing motor |
| Swing speed | 0 - 11 rpm |
| Swing torque | 65 kNm |

Drives and brakes

| | |
|----------------------|--|
| Steering control | 2 levers with pedals giving full independent control of each track |
| Drive method | Hydrostatic |
| Travel operation | Automatic 3-speed selection |
| Gradeability | 70%, 35° |
| Max. travel speeds | |
| Lo / Mi / Hi | 3.0 / 4.1 / 5.5 km/h |
| Maximum drawbar pull | 20600 kg |
| Brake system | Hydraulically operated discs in each travel motor |

Undercarriage

| | |
|-----------------------------|--|
| Construction | X-frame centre section with box section track frames |
| Track assembly | |
| Type | Fully sealed |
| Shoes (each side) | 49 |
| Tension | Combined spring and hydraulic unit |
| Rollers | |
| Track rollers (each side) | 9 |
| Carrier rollers (each side) | 2 |

Environment

| | |
|---|---|
| Engine emissions | Fully complies with EU Stage V exhaust emission regulations |
| Noise levels | |
| LwA external | 100 dB(A) (2000/14/EC Stage II) |
| LpA operator ear | 71 dB(A) (ISO 6396 dynamic test) |
| Vibration levels (EN 12096:1997) | |
| Hand/arm | ≤ 2.5 m/s ² (uncertainty K = 0.51 m/s ²) |
| Body | ≤ 0.5 m/s ² (uncertainty K = 0.30 m/s ²) |
| Contains fluorinated greenhouse gas HFC-134a (GWP 1430). Quantity of gas 0.8 kg; CO ₂ equivalent 1.14 t | |

Operating weight (appr.)

| | Mono boom | | Two-piece boom | |
|------------------------------------|------------------|--------------------------------|------------------|--------------------------------|
| | Operating weight | Ground pressure | Operating weight | Ground pressure |
| Triple grouser shoes | | | | |
| 600 mm (with optional dozer blade) | 24350 (26800) kg | 0.51 (0.56) kg/cm ² | 25475 (27925) kg | 0.54 (0.58) kg/cm ² |
| 700 mm | 24620 kg | 0.44 kg/cm ² | 25745 kg | 0.47 kg/cm ² |
| 800 mm | 24945 kg | 0.39 kg/cm ² | 26070 kg | 0.42 kg/cm ² |
| 900 mm | 25275 kg | 0.35 kg/cm ² | 26400 kg | 0.37 kg/cm ² |
| 600 mm road liner | 24760 kg | 0.52 kg/cm ² | 25885 kg | 0.54 kg/cm ² |

Operating weight, including specified work equipment, 2.9 m arm, 650 kg bucket, operator, lubricant, coolant, full fuel tank and the standard equipment.

Max. bucket capacity and weight

| Arm length | Mono boom | | | |
|--|---------------------|---------|---------------------|---------|
| | 2.4 m | | 2.9 m | |
| Material weight up to 1.2 t/m ³ | 1.49 m ³ | 1100 kg | 1.37 m ³ | 1000 kg |
| Material weight up to 1.5 t/m ³ | 1.36 m ³ | 1100 kg | 1.26 m ³ | 950 kg |
| Material weight up to 1.8 t/m ³ | 1.18 m ³ | 900 kg | 1.10 m ³ | 875 kg |

Max. bucket capacity and weight

| Arm length | Two-piece boom | | | |
|--|---------------------|---------|---------------------|--------|
| | 2.4 m | | 2.9 m | |
| Material weight up to 1.2 t/m ³ | 1.43 m ³ | 1025 kg | 1.32 m ³ | 975 kg |
| Material weight up to 1.5 t/m ³ | 1.22 m ³ | 925 kg | 1.12 m ³ | 875 kg |
| Material weight up to 1.8 t/m ³ | 1.06 m ³ | 850 kg | 0.97 m ³ | 800 kg |

Max. capacity and weight have been calculated according to ISO 10567:2007.

Please consult with your distributor for the correct selection of buckets and attachments to suit the application.


Bucket and arm force

| Arm length | 2.4 m | 2.9 m |
|----------------------------------|----------|----------|
| Bucket digging force | 16500 kg | 14100 kg |
| Bucket digging force at PowerMax | 17500 kg | 15200 kg |
| Arm crowd force | 12200 kg | 10300 kg |
| Arm crowd force at PowerMax | 13000 kg | 11000 kg |

Dimensions and performance figures

Machine dimensions

| | | |
|----|---------------------------------------|-----------------------|
| A | Overall width of upper structure | 2980 mm |
| B | Overall height (top of cab) | 3050 mm |
| B' | Overall height (top of handrail) | 3240 mm |
| C | Overall length of basic machine | 4450 mm |
| D | Tail length | 1785 mm |
| | Tail swing radius | 1785 mm |
| E | Clearance under counterweight | 1075 mm |
| F | Machine tail height | 2915 mm |
| G | Ground clearance | 440 mm |
| H | Tumbler centre distance | 3655 mm |
| I | Track length | 4450 mm |
| J | Track gauge | 2380 mm |
| K | Track shoe width | 600, 700, 800, 900 mm |
| L | Overall track width with 600 mm shoes | 2980 mm |
| | Overall track width with 700 mm shoes | 3080 mm |
| | Overall track width with 800 mm shoes | 3180 mm |
| Q | Distance, swing center to blade | 3040 mm |
| R | Blade, max. lifting height | 635 mm |
| S | Height of blade | 745 mm |
| T | Blade, max. digging depth | 390 mm |
| | Blade width | 2985 mm |

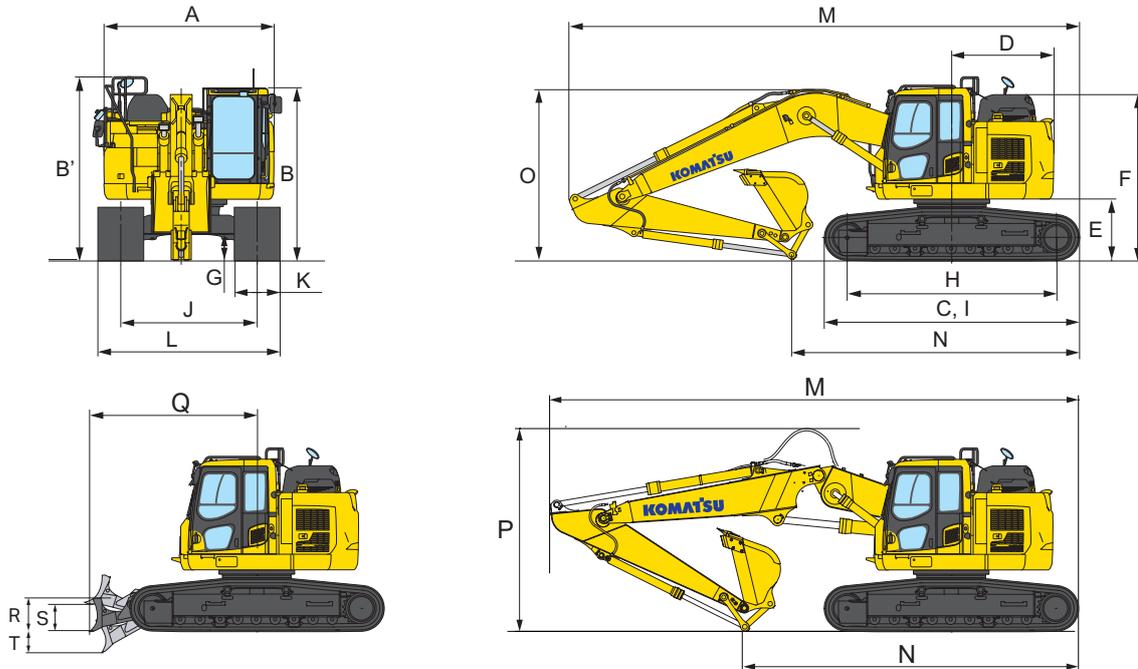


Transport dimensions

| | Mono boom | | Two-piece boom | |
|-----------------------------------|-----------|---------|----------------|---------|
| Arm length | 2.4 m | 2.9 m | 2.4 m | 2.9 m |
| M Transport length | 8980 mm | 8920 mm | 9190 mm | 9285 mm |
| N Length on ground (transport) | 5890 mm | 5050 mm | 6595 mm | 5855 mm |
| O Overall height (to top of boom) | 3165 mm | 3105 mm | - | - |
| P Overall height (to top of hose) | - | - | 3610 mm | 3575 mm |

Working range


Working range

| Arm length | Mono boom | |
|--|-----------|----------|
| | 2.4 m | 2.9 m |
| A Max. digging height | 10380 mm | 10700 mm |
| B Max. dumping height | 7470 mm | 7825 mm |
| C Max. digging depth | 6095 mm | 6620 mm |
| D Max. vertical wall digging depth | 5315 mm | 5980 mm |
| E Max. digging depth of cut for 2.44 m level | 5840 mm | 6370 mm |
| F Max. digging reach | 9395 mm | 9875 mm |
| G Max. digging reach at ground level | 9205 mm | 9700 mm |
| H Min. swing radius | 2700 mm | 2310 mm |
| I Max. height at min. swing radius | 8340 mm | 8250 mm |

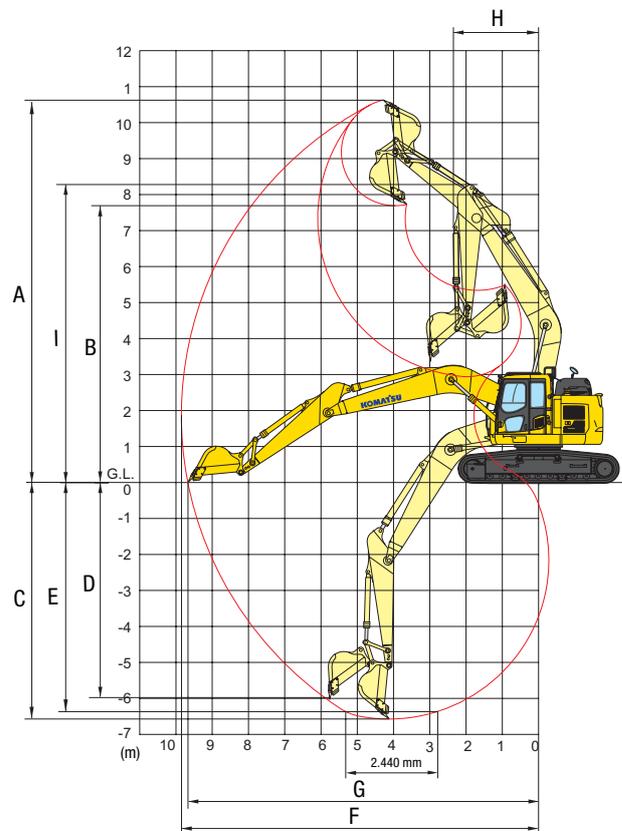


Working range

| Arm length | Two-piece boom | |
|--|----------------|----------|
| | 2.4 m | 2.9 m |
| A Max. digging height | 11305 mm | 11790 mm |
| B Max. dumping height | 8380 mm | 8830 mm |
| C Max. digging depth | 5725 mm | 6225 mm |
| D Max. vertical wall digging depth | 4750 mm | 5350 mm |
| E Max. digging depth of cut for 2.44 m level | 5535 mm | 6050 mm |
| F Max. digging reach | 9775 mm | 10270 mm |
| G Max. digging reach at ground level | 9595 mm | 10095 mm |
| H Min. swing radius | 2570 mm | 2370 mm |
| I Max. height at min. swing radius | 8735 mm | 8755 mm |

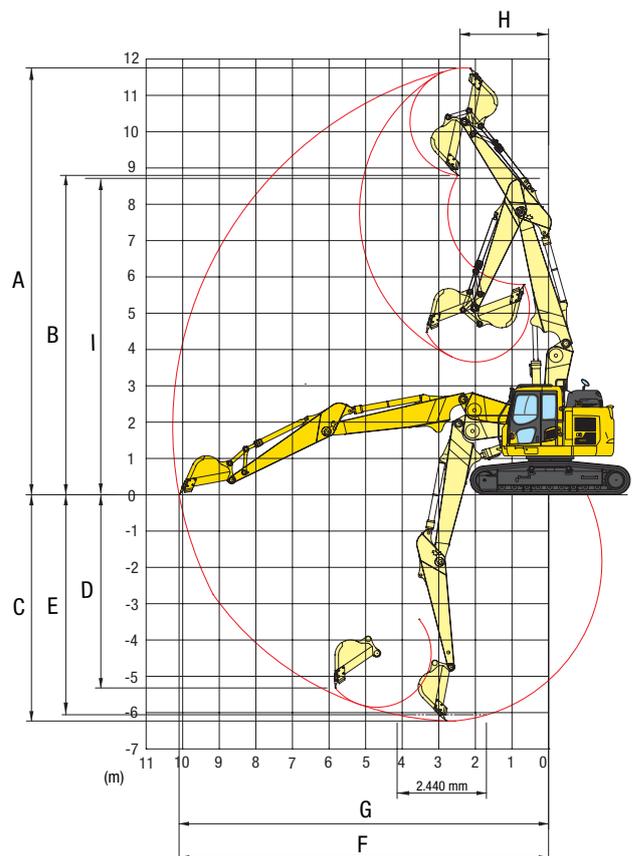

Lifting capacity

Mono boom

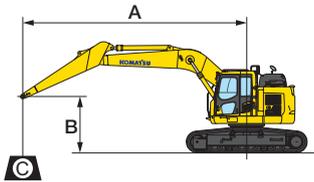

- A - Reach from swing center
- B - Bucket hook height
- C - Lifting capacities

- Rating over front
- Rating over side
- Rating at maximum reach

Weights:
 With 2.4 m arm: bucket linkage and bucket cylinder: 360 kg
 With 2.9 m arm: bucket linkage and bucket cylinder: 335 kg

With 700 mm shoes

| Arm length | A | | | | 7.5 m | | 6.0 m | | 4.5 m | | 3.0 m | | 1.5 m | |
|--------------|--------|----|-------|-------|-------|------|-------|------|--------|------|--------|--------|--------|--------|
| | B | | | | | | | | | | | | | |
| <p>2.4 m</p> | 6.0 m | kg | *5155 | 4275 | | | *6615 | 5385 | | | | | | |
| | 4.5 m | kg | *5215 | 3615 | 5675 | 3725 | *7305 | 5185 | *8385 | 7895 | | | | |
| | 3.0 m | kg | 5035 | 3285 | 5535 | 3605 | 7675 | 4875 | *11055 | 7295 | | | | |
| | 1.5 m | kg | 4875 | 3155 | 5385 | 3465 | 7395 | 4625 | 11455 | 6695 | | | | |
| | 0.0 m | kg | 4975 | 3185 | 5275 | 3365 | 7175 | 4425 | 11075 | 6385 | *8265 | *8265 | | |
| | -1.5 m | kg | 5405 | 3435 | 5255 | 3345 | 7085 | 4345 | 10985 | 6305 | *10565 | *10565 | *8975 | *8975 |
| | -3.0 m | kg | 6495 | 4055 | | | 7155 | 4405 | 11125 | 6425 | *18305 | 12285 | *13825 | *13825 |
| | -4.5 m | kg | *9715 | 5885 | | | | | *10945 | 6735 | *15005 | 12525 | | |
| <p>2.9 m</p> | 6.0 m | kg | *3640 | *3640 | *3990 | 3860 | | | | | | | | |
| | 4.5 m | kg | *3660 | 3330 | 5760 | 3800 | *6740 | 5290 | | | | | | |
| | 3.0 m | kg | *3810 | 3060 | 5600 | 3660 | 7810 | 4990 | *10090 | 7510 | *14590 | 14010 | | |
| | 1.5 m | kg | *4100 | 2940 | 5430 | 3500 | 7490 | 4700 | 11680 | 6890 | *7740 | *7740 | | |
| | 0.0 m | kg | 4590 | 2960 | 5300 | 3380 | 7230 | 4480 | 11200 | 6490 | *6080 | *6080 | | |
| | -1.5 m | kg | 4930 | 3150 | 5230 | 3320 | 7090 | 4360 | 11010 | 6330 | *10190 | *10190 | *6060 | *6060 |
| | -3.0 m | kg | 5730 | 3610 | | | 7100 | 4370 | 11080 | 6390 | *17170 | 12150 | *10620 | *10620 |
| | -4.5 m | kg | 7840 | 4810 | | | | | *11300 | 6600 | *16750 | 12550 | | |


* Load is limited by hydraulic capacity rather than tipping.

Ratings are based on SAE Standard No. J1097.

Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load.

When lifting with additional equipment installed to the arm, please subtract the weight of all additional equipment from the values stated.

Mono boom - with dozer blade

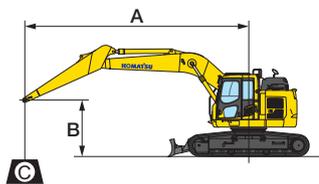

- A - Reach from swing center
- B - Bucket hook height
- C - Lifting capacities


- Rating over front
- Rating over side
- Rating at maximum reach

Weights:
 With 2.4 m arm: bucket linkage and bucket cylinder: 360 kg
 With 2.9 m arm: bucket linkage and bucket cylinder: 335 kg

With 600 mm shoes and dozer blade DOWN

| Arm length | A | | 7.5 m | | 6.0 m | | 4.5 m | | 3.0 m | | 1.5 m | | |
|------------|--------|----------|-------|-------|-------|--------|-------|--------|-------|--------|--------|--|--|
| | B | | | | | | | | | | | | |
| | 6.0 m | kg *5630 | 4490 | | | *6950 | 5360 | | | | | | |
| | 4.5 m | kg *5620 | 3740 | | | *7560 | 5200 | *8770 | 8050 | | | | |
| | 3.0 m | kg *5860 | 3380 | *7510 | 3570 | *8590 | 4950 | *11100 | 7440 | | | | |
| | 1.5 m | kg *6370 | 3250 | *7960 | 3470 | *9600 | 4710 | *13050 | 6950 | | | | |
| | 0.0 m | kg *7310 | 3320 | *8230 | 3400 | *10250 | 4550 | *13910 | 6720 | | | | |
| | -1.5 m | kg *8530 | 3650 | | | *10300 | 4510 | *13770 | 6690 | *12720 | *12720 | | |
| | -3.0 m | kg *9000 | 4470 | | | *9320 | 4600 | *12620 | 6800 | | 13120 | | |
| | -4.5 m | kg | 7050 | | | | | | 7140 | | | | |

| | | | | | | | | | | | | | |
|--------|----------|----------|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--|
| | 6.0 m | kg *3780 | *3780 | | | | | | | | | | |
| | 4.5 m | kg *3760 | 3410 | *5730 | 3750 | *7020 | 5310 | | | | | | |
| | 3.0 m | kg *3880 | 3120 | *7150 | 3640 | *8120 | 5050 | *10270 | 7650 | | | | |
| | 1.5 m | kg *4160 | 3010 | *7720 | 3510 | *9260 | 4790 | *12480 | 7100 | | | | |
| | 0.0 m | kg *4670 | 3050 | *8150 | 3410 | *10090 | 4600 | *13720 | 6800 | *7150 | *7430 | | |
| | -1.5 m | kg *5570 | 3300 | *7380 | 3380 | *10370 | 4510 | *13950 | 6700 | *11640 | *11640 | *12050 | |
| -3.0 m | kg *7460 | 3900 | | | *9850 | 4540 | *13190 | 6760 | *17880 | 13000 | | | |
| -4.5 m | kg | 5480 | | | | | | 6980 | | 13400 | | | |

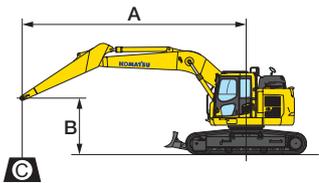

- A - Reach from swing center
- B - Bucket hook height
- C - Lifting capacities

- Rating over front
- Rating over side
- Rating at maximum reach

Weights:
 With 2.4 m arm: bucket linkage and bucket cylinder: 360 kg
 With 2.9 m arm: bucket linkage and bucket cylinder: 335 kg

With 600 mm shoes and dozer blade UP


| Arm length | A | | 7.5 m | | 6.0 m | | 4.5 m | | 3.0 m | | 1.5 m | | |
|------------|--------|----------|-------|------|-------|-------|-------|-------|-------|--|--------|--|--|
| | B | | | | | | | | | | | | |
| | 6.0 m | kg *5630 | 4490 | | | *6950 | 5360 | | | | | | |
| | 4.5 m | kg 5260 | 3740 | | | 7420 | 5200 | 8770 | 8050 | | | | |
| | 3.0 m | kg 4770 | 3380 | 5050 | 3570 | 7140 | 4950 | 11100 | 7440 | | | | |
| | 1.5 m | kg 4620 | 3250 | 4940 | 3470 | 6870 | 4710 | 10780 | 6950 | | | | |
| | 0.0 m | kg 4740 | 3320 | 4860 | 3400 | 6690 | 4550 | 10510 | 6720 | | *12720 | | |
| | -1.5 m | kg 5250 | 3650 | | | 6640 | 4510 | 10470 | 6690 | | 13120 | | |
| -3.0 m | kg | 4470 | | | | 4600 | | 6800 | | | | | |
| -4.5 m | kg | 7050 | | | | | | 7140 | | | | | |

| | | | | | | | | | | | | | |
|--------|--------|----------|-------|------|------|-------|------|--------|------|--------|--------|-------|--------|
| | 6.0 m | kg *3780 | *3780 | | | | | | | | | | |
| | 4.5 m | kg *3760 | 3410 | 5240 | 3750 | *7020 | 5310 | | | | | | |
| | 3.0 m | kg *3880 | 3120 | 5120 | 3640 | 7250 | 5050 | *10270 | 7650 | | | | |
| | 1.5 m | kg *4160 | 3010 | 4980 | 3510 | 6960 | 4790 | 10970 | 7100 | | | | |
| | 0.0 m | kg 4340 | 3050 | 4880 | 3410 | 6740 | 4600 | 10600 | 6800 | *7150 | *7150 | | |
| | -1.5 m | kg 4720 | 3300 | 4840 | 3380 | 6650 | 4510 | 10480 | 6700 | *11640 | *11640 | *7430 | |
| -3.0 m | kg | 3900 | | | | 6680 | 4540 | 10550 | 6760 | | 13000 | | *12050 |
| -4.5 m | kg | 5480 | | | | | | 6980 | | 13400 | | | |

* Load is limited by hydraulic capacity rather than tipping.
 Ratings are based on SAE Standard No. J1097.
 Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load.
 When lifting with additional equipment installed to the arm, please subtract the weight of all additional equipment from the values stated.

Lifting capacity

Two-piece boom

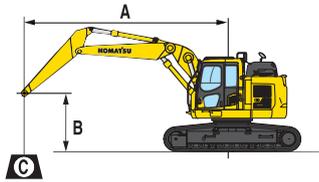

- A - Reach from swing center
- B - Bucket hook height
- C - Lifting capacities

- Rating over front
- Rating over side
- Rating at maximum reach

Weights:
 With 2.4 m arm: bucket linkage and bucket cylinder: 360 kg
 With 2.9 m arm: bucket linkage and bucket cylinder: 335 kg

With 600 mm shoes

| Arm length | A | | | | 7.5 m | | 6.0 m | | 4.5 m | | 3.0 m | | 1.5 m | |
|------------|--------|----|-------|------|-------|------|-------|------|--------|------|-------|--|-------|--|
| | B | | | | | | | | | | | | | |
| 2.4 m | 6.0 m | kg | *5470 | 3580 | | | *7200 | 4850 | | | | | | |
| | 4.5 m | kg | 4850 | 3010 | 5220 | 3250 | 7510 | 4640 | *9520 | 7220 | | | | |
| | 3.0 m | kg | 4440 | 2730 | 5100 | 3140 | 7180 | 4360 | 11370 | 6520 | | | | |
| | 1.5 m | kg | 4320 | 2630 | 4960 | 3020 | 6890 | 4100 | 10760 | 6010 | | | | |
| | 0.0 m | kg | 4430 | 2690 | 4880 | 2940 | 6710 | 3950 | 10540 | 5830 | | | | |
| | -1.5 m | kg | 4870 | 2940 | 4900 | 2960 | 6680 | 3910 | 10550 | 5840 | | | | |
| 2.9 m | 6.0 m | kg | *3600 | 3190 | *4910 | 3400 | *6700 | 4990 | | | | | | |
| | 4.5 m | kg | *3520 | 2750 | 5310 | 3340 | *7380 | 4770 | *8780 | 7460 | | | | |
| | 3.0 m | kg | *3560 | 2520 | 5170 | 3200 | 7300 | 4460 | *10860 | 6760 | | | | |
| | 1.5 m | kg | *3730 | 2430 | 5010 | 3060 | 6980 | 4180 | 10960 | 6170 | | | | |
| | 0.0 m | kg | *4050 | 2470 | 4900 | 2960 | 6760 | 3990 | 10610 | 5890 | | | | |
| | -1.5 m | kg | 4400 | 2670 | 4870 | 2930 | 6680 | 3910 | 10540 | 5830 | | | | |


* Load is limited by hydraulic capacity rather than tipping.

Ratings are based on SAE Standard No. J1097.

Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load.

When lifting with additional equipment installed to the arm, please subtract the weight of all additional equipment from the values stated.

Two-piece boom - with dozer blade

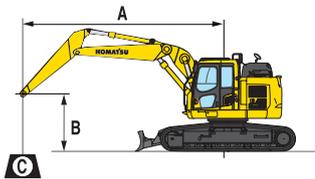


- A - Reach from swing center
- B - Bucket hook height
- C - Lifting capacities

- Rating over front
- Rating over side
- Rating at maximum reach

Weights:
 With 2.4 m arm: bucket linkage and bucket cylinder: 360 kg
 With 2.9 m arm: bucket linkage and bucket cylinder: 335 kg

With 600 mm shoes and dozer blade DOWN

| Arm length | A | | | | 7.5 m | | 6.0 m | | 4.5 m | | 3.0 m | | 1.5 m | |
|------------|--------|----|-------|------|-------|------|--------|------|--------|------|-------|--|-------|--|
| | B | | | | | | | | | | | | | |
| 2.4 m | 6.0 m | kg | *5280 | 3970 | | | *8280 | 5340 | | | | | | |
| | 4.5 m | kg | *6160 | 3360 | *8110 | 3620 | *8990 | 5130 | *10940 | 7930 | | | | |
| | 3.0 m | kg | *6290 | 3060 | *8520 | 3510 | *10030 | 4840 | *13300 | 7230 | | | | |
| | 1.5 m | kg | *6660 | 3960 | *8990 | 3390 | *11010 | 4590 | *15100 | 6730 | | | | |
| | 0.0 m | kg | *7360 | 3030 | *9240 | 3310 | *11580 | 4430 | *15680 | 6540 | | | | |
| | -1.5 m | kg | *8630 | 3310 | *8870 | 3330 | *11500 | 4400 | *15230 | 6550 | | | | |
| -3.0 m | kg | | | | | | | | | | | | | |
| 2.9 m | 6.0 m | kg | *3600 | 3550 | *4910 | 3770 | *6700 | 5470 | | | | | | |
| | 4.5 m | kg | *3520 | 3070 | *6680 | 3710 | *7380 | 5250 | *8780 | 8170 | | | | |
| | 3.0 m | kg | *3560 | 2830 | *7130 | 3570 | *8350 | 4950 | *10860 | 7470 | | | | |
| | 1.5 m | kg | *3730 | 2740 | *7630 | 3430 | *9310 | 4670 | *12680 | 6890 | | | | |
| | 0.0 m | kg | *4050 | 2790 | *7980 | 3330 | *9960 | 4480 | *13570 | 6610 | | | | |
| | -1.5 m | kg | *4620 | 3010 | *7960 | 3330 | *10110 | 4400 | *13530 | 6550 | | | | |
| -3.0 m | kg | | | | | | | | | | | | | |

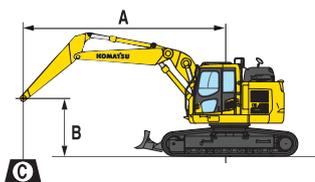

- A - Reach from swing center
- B - Bucket hook height
- C - Lifting capacities

- Rating over front
- Rating over side
- Rating at maximum reach

Weights:
 With 2.4 m arm: bucket linkage and bucket cylinder: 360 kg
 With 2.9 m arm: bucket linkage and bucket cylinder: 335 kg

With 600 mm shoes and dozer blade UP

| Arm length | A | | | | 7.5 m | | 6.0 m | | 4.5 m | | 3.0 m | | 1.5 m | |
|------------|--------|----|-------|------|-------|------|-------|------|--------|------|-------|--|-------|--|
| | B | | | | | | | | | | | | | |
| 2.4 m | 6.0 m | kg | 5650 | 3970 | | | 7670 | 5340 | | | | | | |
| | 4.5 m | kg | 4800 | 3360 | 5160 | 3620 | 7430 | 5130 | *10940 | 7930 | | | | |
| | 3.0 m | kg | 4390 | 3060 | 5040 | 3510 | 7100 | 4840 | 11250 | 7230 | | | | |
| | 1.5 m | kg | 4270 | 2960 | 4910 | 3390 | 6810 | 4590 | 10640 | 6730 | | | | |
| | 0.0 m | kg | 4380 | 3030 | 4830 | 3310 | 6640 | 4430 | 10420 | 6540 | | | | |
| | -1.5 m | kg | | 3310 | 4840 | 3330 | 6600 | 4400 | 10430 | 6550 | | | | |
| -3.0 m | kg | | | | | | | | | | | | | |
| 2.9 m | 6.0 m | kg | *3600 | 3550 | *4910 | 3770 | *6700 | 5470 | | | | | | |
| | 4.5 m | kg | *3520 | 3070 | 5260 | 3710 | *7380 | 5250 | *8780 | 8170 | | | | |
| | 3.0 m | kg | *3560 | 2830 | 5110 | 3570 | 7230 | 4950 | *10860 | 7470 | | | | |
| | 1.5 m | kg | *3730 | 2740 | 4960 | 3430 | 6900 | 4670 | 10840 | 6890 | | | | |
| | 0.0 m | kg | 4020 | 2790 | 4840 | 3330 | 6690 | 4480 | 10500 | 6610 | | | | |
| | -1.5 m | kg | | 3010 | 4810 | 3300 | 6600 | 4400 | 10430 | 6550 | | | | |
| -3.0 m | kg | | | | | | | | | | | | | |

* Load is limited by hydraulic capacity rather than tipping.

Ratings are based on SAE Standard No. J1097.

Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load.

When lifting with additional equipment installed to the arm, please subtract the weight of all additional equipment from the values stated.

Standard and optional equipment

Engine

| | |
|---|---|
| Komatsu SAA6D107E-3 turbocharged common rail direct injection diesel engine | ● |
| EU Stage V compliant | ● |
| Suction type cooling fan with radiator fly screen | ● |
| Automatic engine warm-up system | ● |
| Engine overheat prevention system | ● |
| Fuel control dial | ● |
| Auto-deceleration function | ● |
| Adjustable idle shutdown | ● |
| Engine key stop | ● |
| Engine ignition can be password secured on request | ● |
| Alternator 24 V / 85 A | ● |
| Starter motor 24 V / 5.5 kW | ● |
| Batteries 2 × 12 V / 152 Ah | ● |

Hydraulic system

| | |
|--|---|
| Electronic closed-centre load sensing (E-CLSS) hydraulic system (HydrauMind) | ● |
| Pump and engine mutual control (PEMC) system | ● |
| 6-working mode selection system; Power mode, Economy mode, Breaker mode, Attachment Power and Attachment Economy mode, and Lifting/Fine Operation mode | ● |
| PowerMax function | ● |
| PPC wrist control levers for arm, boom, bucket and swing, with sliding proportional control for attachments and 3 auxiliary buttons | ● |
| Prepared for hydraulic quick-coupler | ● |
| Additional hydraulic functions | ○ |
| Komatsu Integrated Attachment Control (KIAC) | ○ |

Undercarriage

| | |
|---------------------------------------|---|
| Track frame under-guards | ● |
| 600 mm triple grouser shoes | ● |
| 700, 800, 900 mm triple grouser shoes | ○ |
| 600 mm road-liner (rubber) shoes | ○ |
| Full length track roller guards | ○ |
| Dozer blade (with 600 mm shoes only) | ○ |

Drives and brakes

| | |
|---|---|
| Hydrostatic, 3-speed travel system with automatic shift and planetary gear type final drives, and hydraulic travel and parking brakes | ● |
| PPC control levers and pedals for steering and travel | ● |

Cabin

| | |
|--|---|
| Reinforced safety SpaceCab™; Highly pressurised and tightly sealed hyper viscous mounted cab with tinted safety glass windows, large roof hatch, pull-up type front window with locking device, removable lower window, front window wiper with intermittent feature, sun roller blind, cigarette lighter, ashtray, luggage shelf, floor mat | ● |
| Heated, high-back air-suspended seat with lumbar support, console mounted height adjustable arm rests, and retractable seat belt | ● |
| Automatic climate control system | ● |
| 12/24 Volt power supplies | ● |
| Beverage holder | ● |
| Radio | ● |
| Auxiliary input (MP3 jack) | ● |
| Lower wiper | ○ |
| Rain visor (not with OPG) | ○ |
| DAB+ digital radio w. auxiliary input (MP3 jack) | ○ |

Service and maintenance

| | |
|--|---|
| Automatic fuel line de-aeration | ● |
| Double element type air cleaner with dust indicator and auto dust evacuator | ● |
| Komtrax – Komatsu wireless monitoring system (4G) | ● |
| Komatsu Care – a maintenance program for Komatsu customers | ● |
| Multifunction video compatible colour monitor with Equipment Management and Monitoring System (EMMS) and efficiency guidance | ● |
| Toolkit | ● |
| Service points | ● |

Safety equipment

| | |
|--|---|
| KomVision surround view system | ● |
| Electric horn | ● |
| Overload warning device | ● |
| Audible travel alarm | ● |
| Boom safety valves | ● |
| Large handrails, rear-view mirrors | ● |
| Battery main switch | ● |
| ROPS compliant to ISO 12117-2:2008 | ● |
| Emergency engine stop switch | ● |
| Seat belt caution indicator | ● |
| Neutral position detection system | ● |
| Arm safety valve | ● |
| OPG Level II front guard (FOPS), hinged type | ○ |
| OPG Level II top guard (FOPS) | ○ |

LED lighting system

| | |
|--|---|
| Working lights: 2 revolving frame, 1 boom (l.h.) | ● |
| Additional working lights (#1): 2 cab roof (front), 1 cab roof (rear), 1 boom (r.h.), 1 counterweight, beacon | ○ |
| Additional working lights (#2): 4 cab roof (front), 1 cab roof (rear), 1 boom (r.h.), 1 counterweight, 2 boom cylinders, 2 revolving frame (l.h. + r.h.), beacon | ○ |

Work equipment

| | |
|---------------------------------|---|
| Mono boom | ○ |
| Two-piece boom | ○ |
| Bucket linkage with lifting eye | ○ |
| 2.4 m; 2.9 m arms | ○ |
| Komatsu buckets | ○ |
| Komatsu breakers | ○ |

Other equipment

| | |
|---|---|
| Standard counterweight | ● |
| Remote greasing for swing circle and pins | ● |
| Electric refuelling pump with automatic shut-off function | ● |

Further equipment on request

- standard equipment
- optional equipment



A wide range of buckets and attachments is available. Your Komatsu distributor is ready to assist you with the selection of suitable options.

This specification sheet may contain attachments and optional equipment that are not available in your area. Please consult your local Komatsu distributor for those items you may require.

Materials and specifications are subject to change without notice.

Your Komatsu partner:

KOMATSU

[komatsu.eu](https://www.komatsu.eu)

